

# XRF

Wall-mounted relay unit for permanent installation,  
controlled by RFT remote control




## XRF

For regulating appliances that are to be switched on and off at fixed times during the day.


- For countersunk mounting in a two-chamber box (Elko S16)
- May also be mounted directly on wall surface with cowl
- Must be situated above other junction boxes because of antenna

XRF

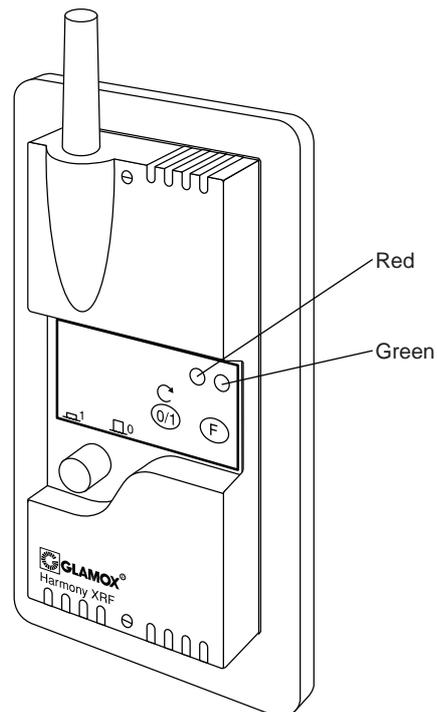

## Specifications:

Max. output load	14A
Main switch	Two pole on/off switch
Casing class	IP 20
Power transfer	Relay
Power indicator	Red LED is lit when relay is switched on
Radio indicator	Green LED is lit during radio reception
Locking function	All units may be locked from the RFT remote control to prevent tampering

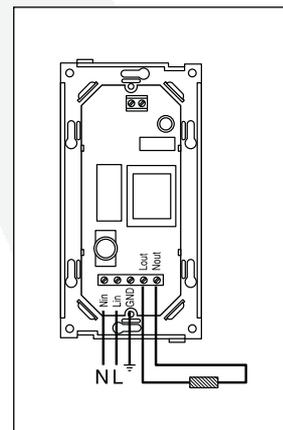

XRF  
XRF, 230V

Item No.  
755 225 005

EI. Nr.  
54 207 93